AD649315

ABYSSALLY GENERATED *T* PHASES

By

ROCKNE H. JOHNSON, ROGER A. NORRIS, and FREDERICK K. DUENNEBIER

JANUARY 1967

D D C
RECEIVED
APR 3 1967
C

HAWAII INSTITUTE OF GEOPHYSICS
UNIVERSITY OF HAWAII

ABYSSALLY GENERATED $\underline{T}$ PHASES

By

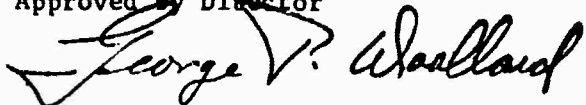Rockne H. Johnson, Roger A. Norris, and
Frederick K. Duennebier

January 1967

Prepared for

Advanced Research Projects Agency
under Contract No. Nonr-3748(01)

ARPA Order No. 218 Amendment 7
Project Code 8100

Approved by Director

George P. Woollard

Date: 17 January 1967

CONTENTS

ABSTRACT

Two distinct types of signals have been identified from studies of T-phase spectra and source locations. One, with its source at a shoaling slope of the ocean bottom and with dominant frequencies near 4 cps, is the previously recognized and described classic T phase. The other, with its source in deep water and with dominant frequencies near 30 cps, is newly identified and is here termed the abyssally generated, or abyssal, T phase. Scattering from the sea surface is proposed as a mechanism for producing rays which propagate through the ocean with an apparent velocity equal to sofar velocity. The sea surface roughness is hypothesized as shaping the spectrum of the abyssal T phase. A synthesis of the power-level record is derived which relates the degree of sharpness of the abyssal T-phase peak with focal depth.

INTRODUCTION

The classic T phase is believed to be refracted into the ocean at a sloping bottom and to enter the ocean sound channel after undergoing downslope propagation. It is characterized by frequencies peaking at about 4 cycles per second. Recent evidence indicates that an additional mechanism operates which favors higher frequencies and is not restricted to a sloping bottom. The resulting signal, characteristic of earthquakes which occur under the deep ocean bottom, is here termed abyssally generated, in distinction to the classic slope-generated T phase.

BACKGROUND

Tolstoy and Ewing [1950] discussed conditions at the source which are favorable to the production of a T phase. They pointed out that where an earthquake occurs under a flat ocean bottom, the sound energy can enter the ocean sound channel only by diffraction or some closely analogous process. The location of an epicenter on a slope was recognized as a more favorable source condition. Milne [1959] specified downslope propagation as the mechanism for projecting acoustic rays from a nuclear explosion, occurring in a land-locked area, into the sound channel. Johnson et al. [1963] compared the intensities of T phases from the Andreanof Islands for a variety of source situations. It was observed that T phases from earthquakes with 'epicenters at the lower end, and to seaward, of the continental slope are typically weak or not received'. This pattern was considered to support downslope propagation as the mechanism for projecting acoustic energy into the ocean sound channel.

The development and operation of a program for routine location of T-phase sources [Johnson, 1966] allowed the sites of T-phase generation to be computed from arrival times at a hydrophone network. A study of the aftershock sequence of the Rat Islands earthquake of February 1965 [Johnson and Norris, 1966] showed that, although the preponderance of T phases were generated at distinct radiators along the Aleutian Ridge, a significant number of them had sources in abyssal regions. The corresponding earthquake epicenters, as reported by the U. S. Coast and Geodetic Survey, (C&GS), nearly coincided with the computed T-phase sources. The strength of these abyssally generated T phases was found to be about 10 decibels lower than that for T phases generated at the ridge by an earthquake of the same magnitude.

NEW EVIDENCE

On 29 July 1965 an earthquake of magnitude 6.4 occurred under the Aleutian Trench off Amukta Pass. The C&GS reported the origin at 51.2N, 171.3W, 23 km, 08h 29m 22.1s. The resulting T phase, recorded at California, Oahu, Midway, Wake, and Eniwetok, was of exceptionally long

BLANK PAGE

duration with two peaks in the power level (See Figure 1).

Magnetic tape recordings of this T phase were also available from the stations at Eniwetok, Wake, Midway, and Oahu. A distinct difference in the spectral composition of the two peaks was noted on aural examination of these recordings. While the later peak sounded practically the same as all other T phases which we had encountered, the frequencies for the earlier peak were noticeably higher.

The T-phase sources were computed for both peaks using sofar velocities and arrival times read from the magnetic tapes. The California station was not used in the computations however, since, lacking a magnetic tape recording, the high- and low-frequency peaks could not be identified. For the high-frequency peak, computations showed a source at 51.1N, 171.6W, 08h 29m 26s, and for the low-frequency peak, a source at 52.1N, 172.4W, 08h 29m 40s. As plotted in Figure 2, the source location for the high-frequency peak was in the Aleutian Trench, about 24 km from the epicenter; that for the low-frequency peak was on the Aleutian Ridge, about 126 km from the epicenter.

The Oahu magnetic tape record was processed by a Northrop Nortronics ST-701 Spectral Contour Plotter. The result, shown in Figure 3, illustrates the separation in time and frequency of the two peaks. The earlier peak is centered at about 30 cps while the later peak is centered at about 10 cps. No correction was made to this figure for the response of the hydrophone system. Such a correction would shift the peak power to lower frequencies.

The spectral contour plot of a classic T phase, with its source at the Aleutian slope, is shown in Figure 4. The C&GS listed this event as originating at 52.1N, 173.1E, 05h 43m 31s, 33 km, 1 November 1966. Note that the spectrum of this signal is quite similar to that of the later phase in Figure 3.

We conclude that the low-frequency peak shown in Figure 3 is the classic T phase, projected into the sound channel by downslope propagation, whereas the high-frequency peak is a T phase generated at the epicenter by an as yet unexplained mechanism. Figure 5 illustrates the spatial relationships of this model. In a vertical section typical of the Aleutian Ridge, rays are directed from an earthquake focus into alternate paths leading to long-distance propagation though the ocean.

It should be noted that the use of sofar velocity in the source calculation for the abyssal T phase gave an origin time which agreed closely with that of the earthquake. Also, the standard deviation of residuals was about one second. This agreement restricts the possible modes of propagation of the abyssal T phase to modes whose apparent velocity is very nearly equal to sofar velocity.

Although we have discussed in some detail only one double-peaked event, we have recognized numerous similar events in the hydrophone records. A partial list of these is given in Table 1. They were obtained by scanning
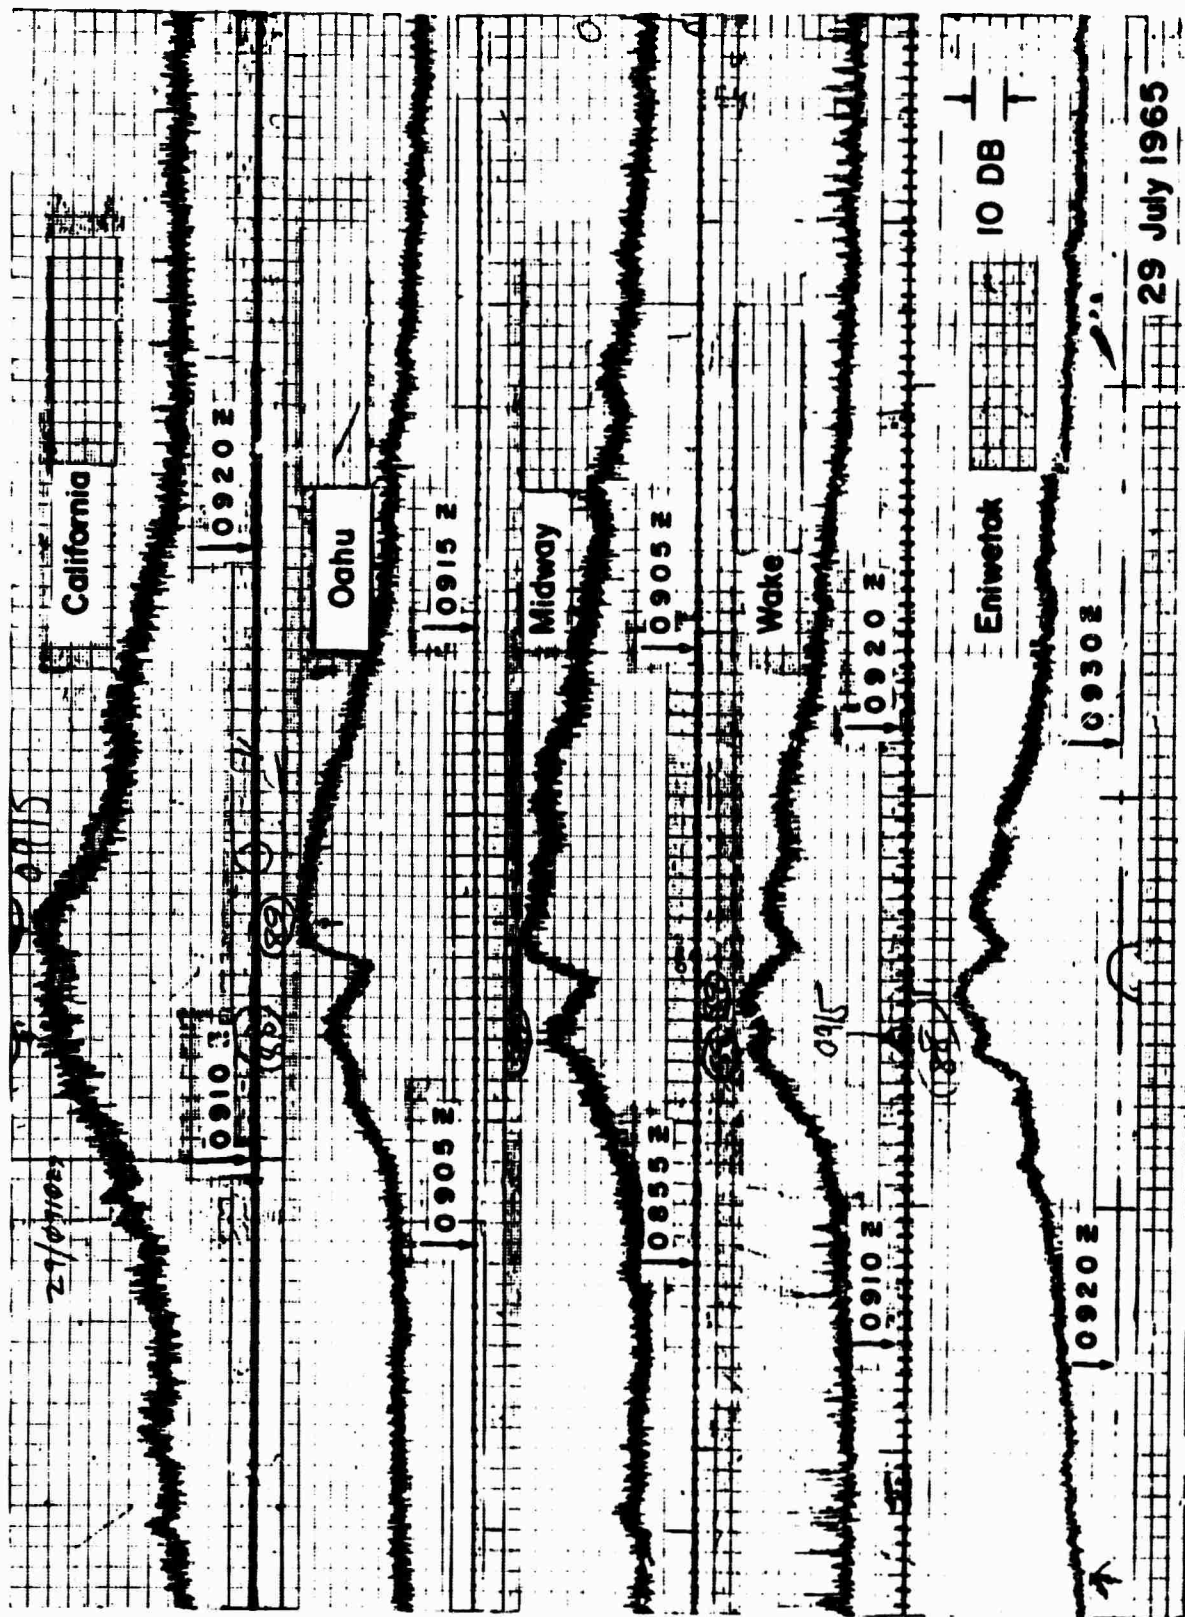
Fig. 1. Sound power level records from five hydrophone stations of the magnitude 6.4 earthquake which originated under the Aleutian Trench on 29 July 1965. The earlier peak is of higher frequency.
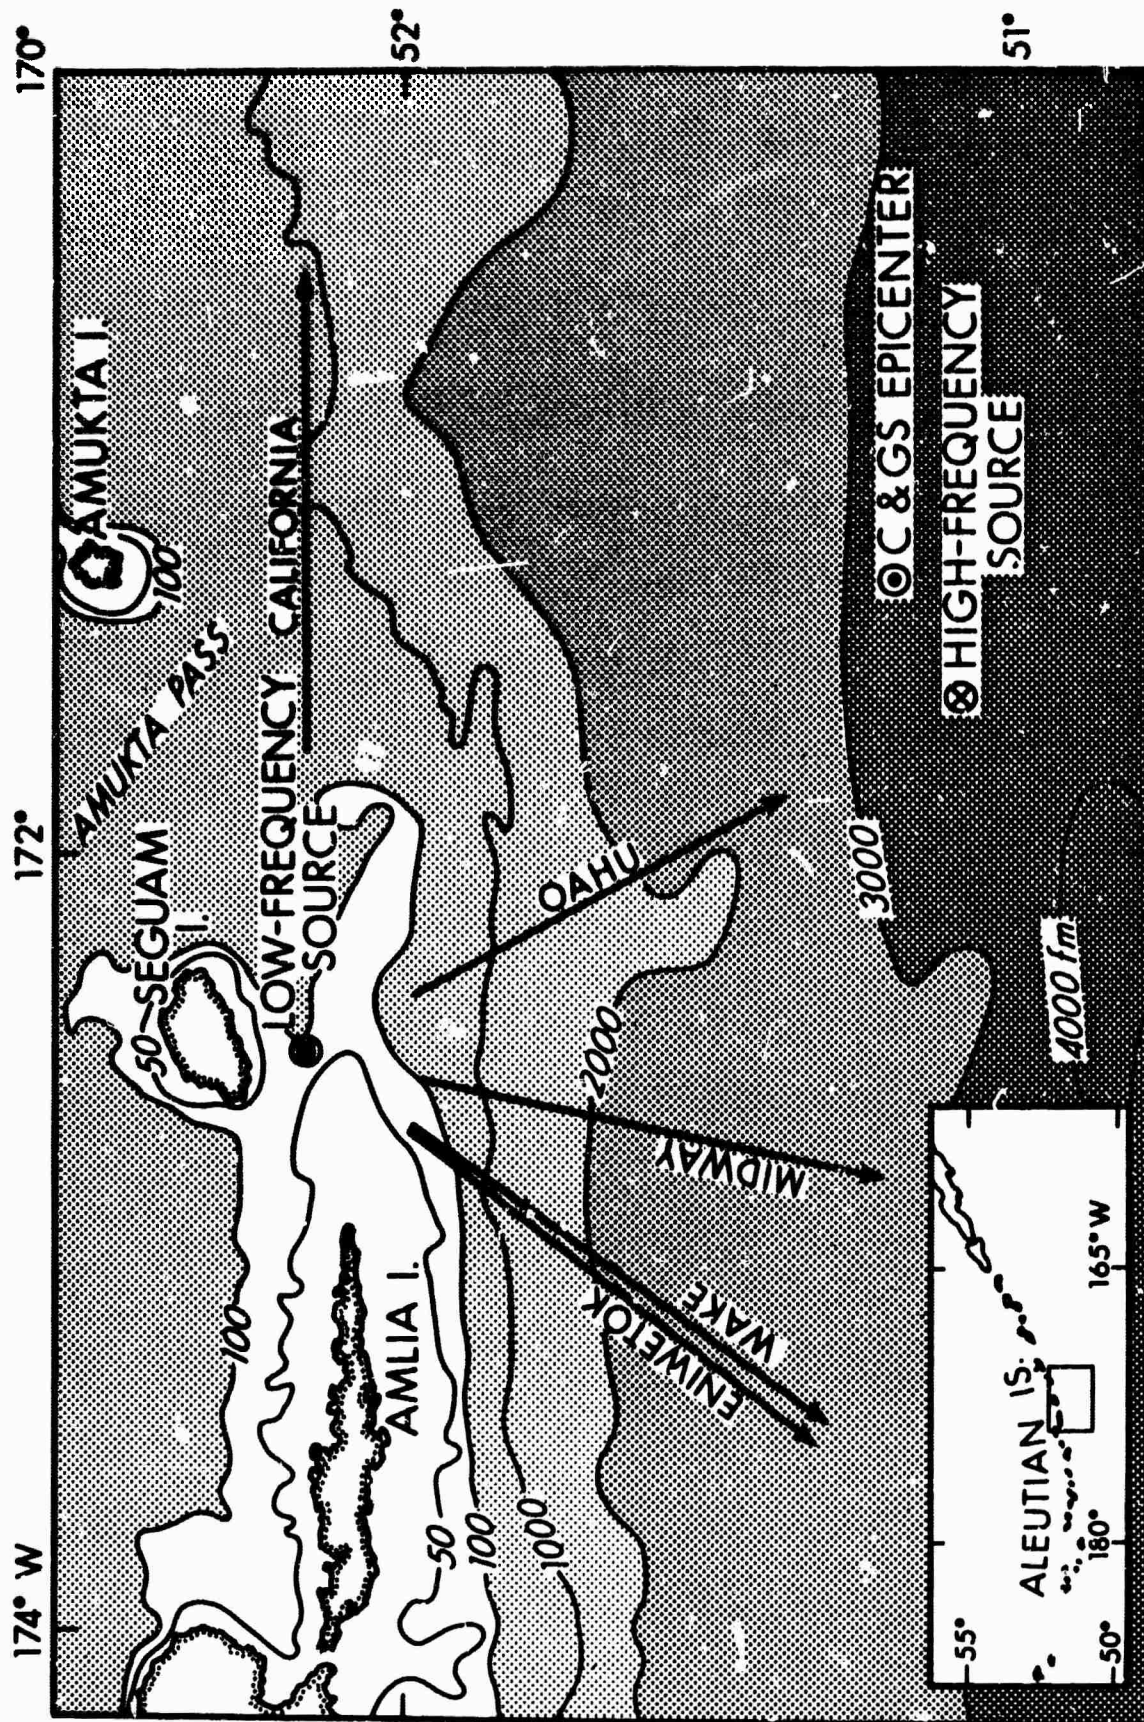
Fig. 2. Epicentral region for the magnitude 6.4 earthquake of 29 July 1965. T-phase source locations and azimuths to recording stations are shown.
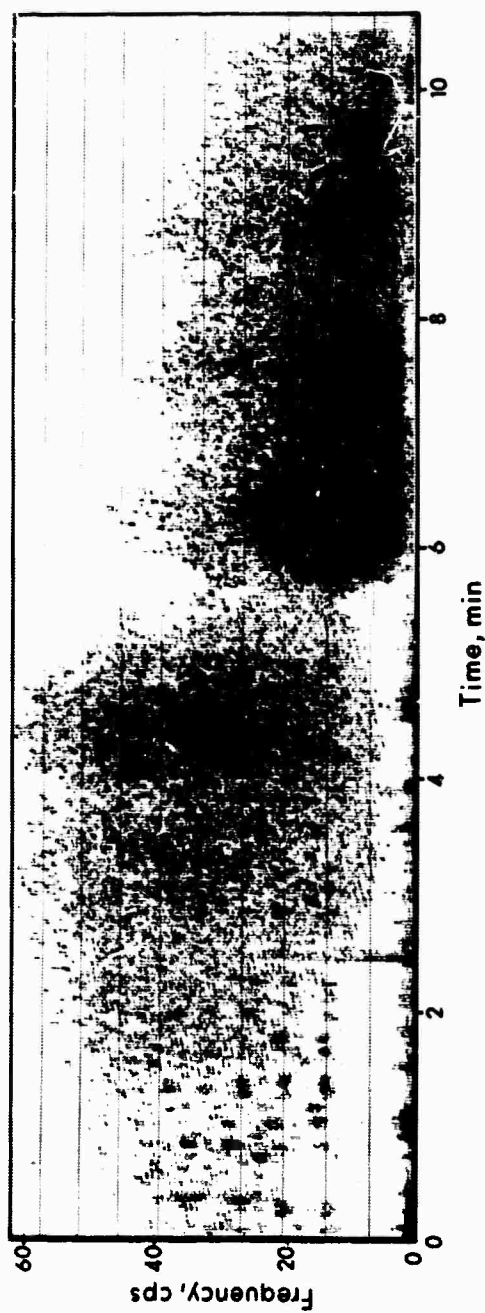
FIG. 3. (*above*) Spectral contour plot of the Oahu record of the Aleutian Trench earthquake of 29 July 1965. The contour interval is 6 decibels. The high frequency peak is abyssally generated.

FIG. 4. (*right*) Spectral contour plot of an Aleutian slope *T* phase. Earthquake origin is 52.1N, 173.1E, 33 km, 05h 43m 31s, 1 November 1966.

Fig. 5. Vertical section typical of the Aleutian Ridge. Rays are directed from an earthquake focus into alternate paths leading to long distance propagation through the ocean. Downslope propagation is shown in the enlarged section. (Vertical and horizontal scale are equal.)

the C&GS epicenter cards for abyssal epicenters. Events listed are those
for which the hydrophone record shows a double-peaked T phase with a
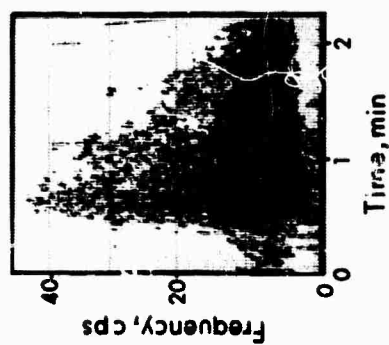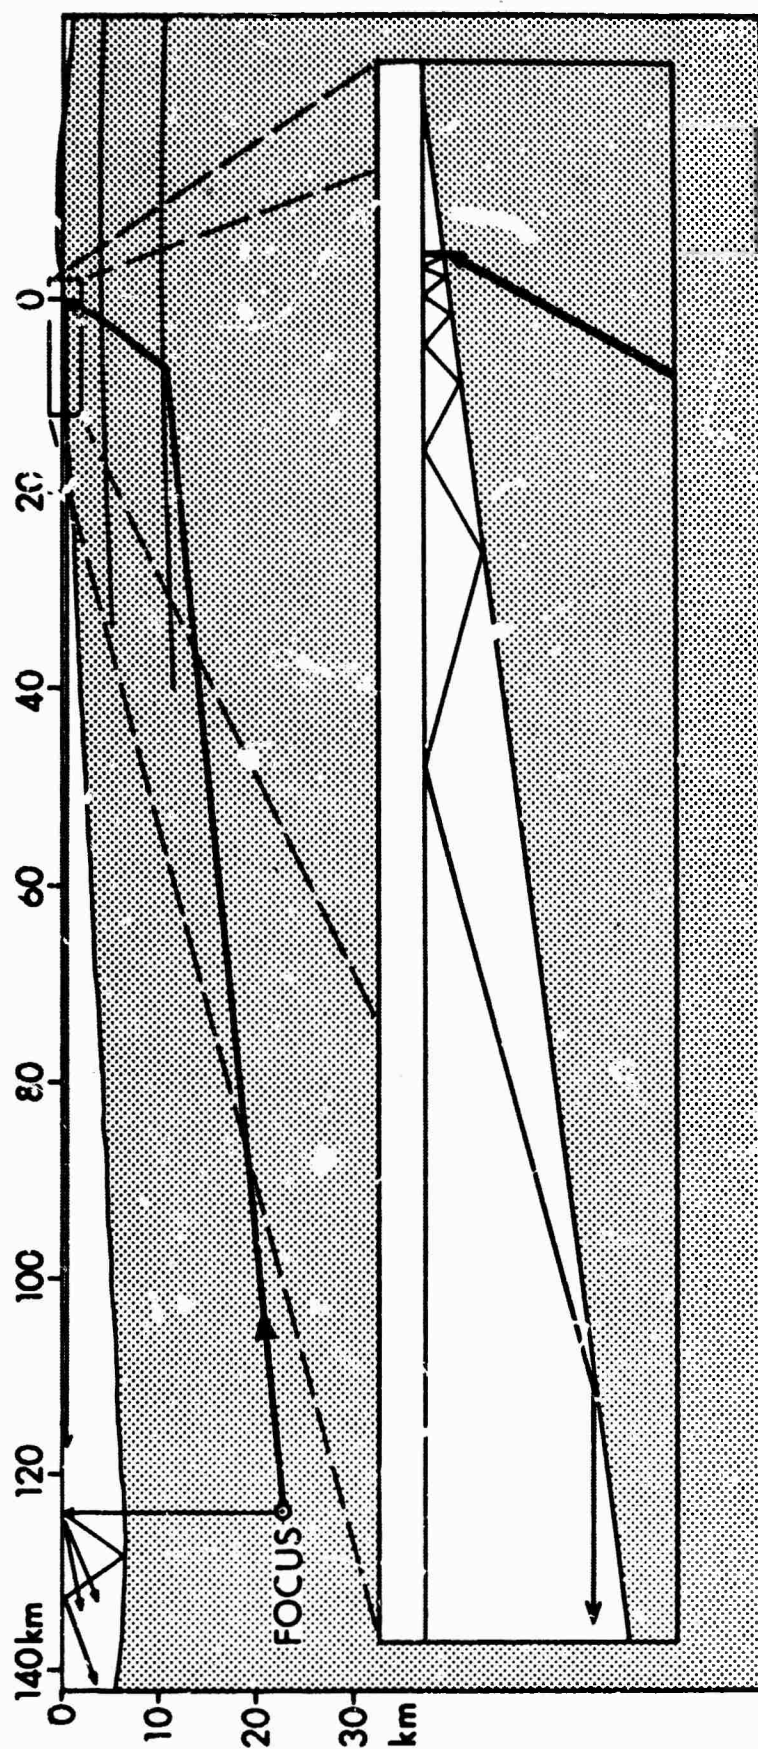gradual increase in the rate of onset extending over several minutes
before the first peak of power level. (By contrast, slope-generated T
phases rise somewhat abruptly out of the background.) For many low-
magnitude earthquakes both peaks could not be detected, presumably due
to oor coupling at the slope [Johnson et al., 1963]. Figure 6 shows
four of the double-peaked events listed in Table 1.

TIME BETWEEN PEAKS

     In support of our findings which specify the regions of generation
of the high- and low-frequency T phases, the observed time between peaks
varies directly with the reported distance offshore (more correctly
offslope) of the epicenter. In Figure 7 these measurements are plotted
for the 10 events listed in Table 1. (The solid circles ind ate the
events for which magnetic tapes were obtained and the characteristic
high and low frequencies were observed.)

     In interpreting Figure 7, we approximate the time between peaks, Δt,
as the travel time for P waves from the focus to the 50-fathom contour
plus the travel time for T waves from the 50-fathom contour back to the
epicenter. We assume a shallow focus and take the mean horizontal
component of velocity to be 6 km/sec in the earth and 1.5 km/sec in the
water. We then have

$$\Delta t = s\left(\frac{1}{6} + \frac{1}{1.5} \right) = \frac{5}{6} s$$

where s is the distance between the epicenter and the 50-fathom contour.
This line is plotted in Figure 7 and is a reasonably good fit to the data.
A computation in which travel time is more carefully accounted for does
not yield significantly different results.

     A portion of the scatter of the data in Figure 7 should be ascribed
to the uncertainty of epicenter location by the seismograph network. For
example, the epicenter computed for the Longshot nuclear explosion was
25 km to the northwest of its location on Amchitka Island [Herrin and
Taggart, 1966]. Preliminary results suggest that the abyssal T-phase
source computations locate the epicenter more accurately than do compu-
tations from P-wave arrivals.

     Although P-wave velocity was used in the foregoing discussion, there
is no reason to exclude S waves as contributing to the energy of the
slope-generated T phase. At the distances under consideration, the S-P
interval is about 10 seconds. Our interpretation is that the contribution
of the S phase is contained in that portion of the T phase which follows

the peak, along with reverberation and arrivals from parts of the ridge more distant from the focus.

MECHANISM

Any hypothesis for the mechanism of generation and propagation of abyssal T phases must be consistent with the higher frequency content of this phase, the lack of a ray path between the P waves and the sofar channel, and an apparent velocity which is very nearly equal to sofar velocity.

Let us first consider a mechanism employing scattering, which, in the ocean, may be categorized as surface scattering, volume scattering, or bottom scattering. Volume scatter could produce sofar rays directly; however such scattering would require the existence of velocity inhomogeneities with dimensions on the order of the wavelengths involved (i.e., 35 to 75 meters). Although Piip [1964] demonstrated that such large-scale inhomogeneities existed in the water column near Bermuda, the velocity contrasts do not seem sufficiently great to sustain significant volume scattering.

On the other hand, scattering from gravity waves at the sea surface, offers stronger possibilities. Rayleigh [1945] treated reflection from a corrugated surface for the case of normal incidence. He showed that corrugations have no effect on sound with wavelength greater than the wavelength of the corrugated surface. Diffracted spectra exist, however, for shorter wavelengths.

An indication of the scale of roughness of the sea surface is given by Moskowitz [1964] who presents power spectra of gravity waves at various wind speeds. For fully developed seas under 20- and 25-knot winds, spectral peaks occur at about 7 and 10 seconds, respectively; the corresponding wavelengths would be about 80 to 160 meters. To the wave lengths which predominate in the slope-generated T phase, such surfaces would appear smooth. The shorter wavelengths observed in the abyssal T phase may be just those which are scattered into nearly horizontal directions by the ocean surface. As illustrated in Figure 5, the requisite scattering may be accumulated during multiple reflections from the ocean surface and floor.

Such a generation mechanism would require that the signal be initially channelled by paths reflecting at the surface and that the signal be either reflected at the bottom or refracted clear of the bottom by the velocity gradient. These paths contain the range of apparent velocity spanned by the sofar rays. For sources in high latitudes, a portion of the initially surface-reflected rays become sofar rays as the sound channel becomes deeper toward the equator. However the ray which would arrive at the same time as the sofar axis ray would still be one which had been reflected at both the surface and the bottom.

Another mechanism was suggested by Biot [1952], i.e., the coupling of energy between Stoneley waves and the sofar channel. Such a mechanism,

Table 1. Source Data for Earthquakes Which Generated Abyssal $\underline{T}$ Phases

Date	Time (UT) h m s	Latitude	Longitude	Place	Mag.	Depth (km)
07 29 65	08 29 22.1	51.2N	171.3W	Andreanof Is.	6.4	23 R
10 01 65	08 52 05.8	50.1N	178.3E	Rat Is.	6.3	32
11 18 65	22 08 45.7	53.1N	161.9W	S. of Alaska	5.3	R
01 05 66	17 21 27	51.2N	171.2W	Andreanof Is.	4.5	33
01 17 66	18 56 16.6	52.0N	171.2W	Andreanof Is.	4.8	46
01 28 66	22 38 12.2	51.6N	157.0E	Kamchatka	5.6	107 R
04 15 66	04 58 06	51.1N	174.3E	Near Is.	4.7	33 R
04 29 66	01 46 43	53.8N	157.8W	Alaska	5.2	33 R
05 11 66	21 39 35.3	48.8N	156.3E	Kuril Is.	5.7	28
06 02 66	03 27 53.3	51.1N	176.0E	Rat Is.	6.0	41 R
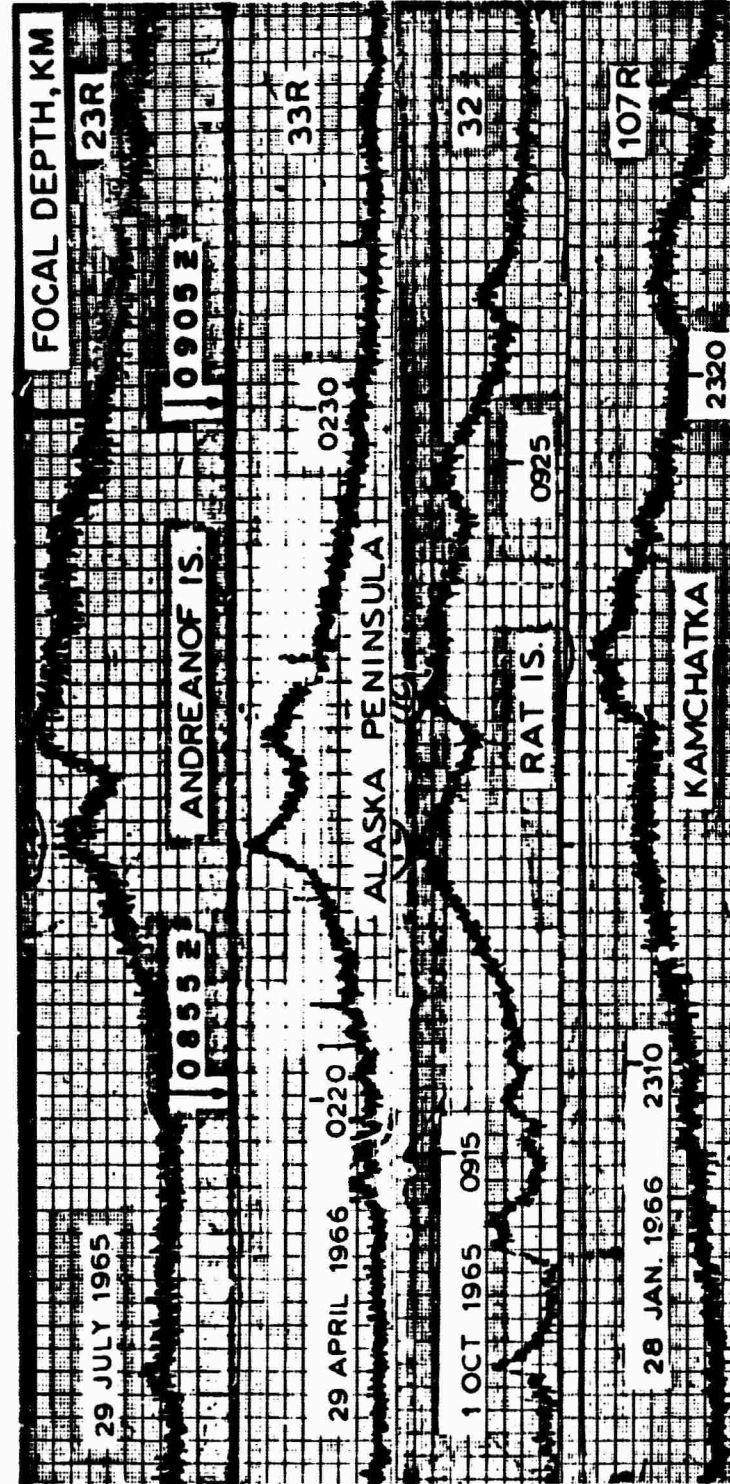
Fig. 6. T phases with both abyssal and slope arrivals selected from the Midway record. Additional earth-quake source data are in Table 1.

Fig. 7. Time separation of high- and low-frequency peaks versus the distance of
the epicenter from the 50-fathom contour. Solid circles indicate the
events for which magnetic tapes were obtained and the characteristic fre-
quencies observed. Open circles indicate that the magnetic tape was not
studied. The slope of the line is theoretical.

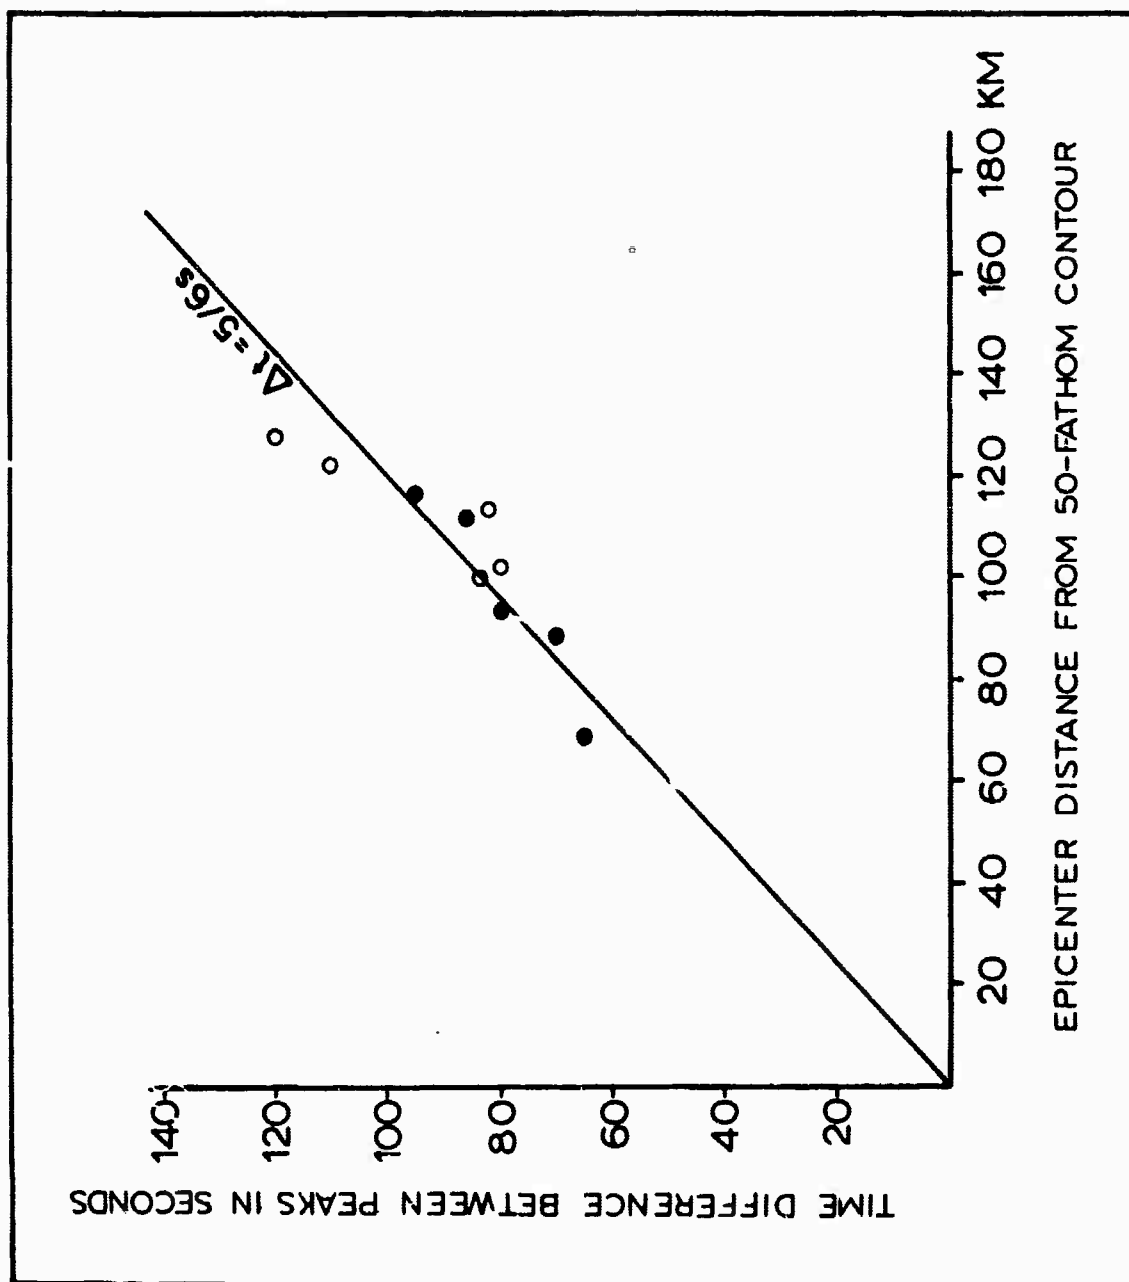however, does not account for the absence of low frequencies from the abyssal T-phase spectrum. Also, as shown in the next section, the power-level variation of the abyssal T-phase record is appropriate to a diffuse source such as a scattering horizon; one would expect a signal of much shorter duration from a velocity-coupled mechanism.

SYNTHESIS OF POWER-LEVEL VARIATION

A conspicuous feature of abyssal T phases is the previously described gradually increasing onset rate. We will now draw a theoretical interpretation of this featu·e and show how it is related to focal depth.

In Figure 8, a conventional cartesian coordinate system has its origin at the epicenter for a point source at depth z = h. The positive x-axis passes through a receiver dS at distance Δ. Under the assumption of spherical spreading in the crust, the intensity of P—wave radiation, incident at the level ocean floor, is described as

$$I \propto h(x^2 + y^2 + h^2)^{-\frac{3}{2}}$$

We assume that, to some layer in the ocean, the insonification of the ocean floor imparts a diffuse energy density which is proportional to I. This assumption does not take account of the variation with the angle of incidence of energy transmitted through the ocean floor. However, this error is partially compensated by neglecting the contribution of S waves at higher angles of incidence [Ergin, 1952].

We wish to obtain an expression for the sound power level at surface elements dS. Let dE' be the energy transmitted to dS from volume element dV which transects the excited layer. For large Δ, dE' is practically a constant fraction of the total energy radiation from dV.

$$dE' \propto I \, dV \, dS \propto h(x^2 + y^2 + h^2)^{-\frac{3}{2}} \, dV \, dS$$

All volume elements from which dS receives energy during the same inter₁ l dt form a hyperbolic strip which is symmetrical about the x-axis. Such strip is indicated by AA' in Figure 8. The major contribution to the integral of dE' along this strip is from the portion near the epicenter (near the x-axis). In order to facilitate integration we will approximate the hyperbola by the straight line tangent to it at the x-axis, i.e., x independent of y. For $dV \propto dx \, dy$

$$dE = \int dE' \propto \int_{y=0}^{y=\infty} h(x^2 + y^2 + h^2)^{-\frac{3}{2}} \, dS \, dx \, dy$$

$$dE \propto h \, dS \, dx \left[\frac{y}{(x^2 + h^2)(x^2 + y^2 + h^2)^{\frac{1}{2}}} \right]_{y=0}^{y=\infty} = \frac{h \, dS \, dx}{x^2 + h^2} \quad .$$

Since this energy arrives during the interval $dt = dx/\gamma$, where γ is T-wave velocity, the intensity at the receiver is

$$\frac{dE}{dt \, dS} \propto \frac{h \gamma}{x^2 + h^2} \quad .$$

The power level with arbitrary reference is

$$L = 10 \log \frac{h}{x^2 + h^2} \quad . \tag{1}$$

The travel time from the epicenter to the receiver is

$$t' = \frac{(x^2 + h^2)^{\frac{1}{2}}}{\alpha} + \frac{\Delta - x}{\gamma}$$

where α is P-wave velocity.

Expressed independently of Δ

$$t = t' - \frac{\Delta}{\gamma} = \frac{(x^2 + h^2)^{\frac{1}{2}}}{\alpha} - \frac{x}{\gamma} \quad . \tag{2}$$
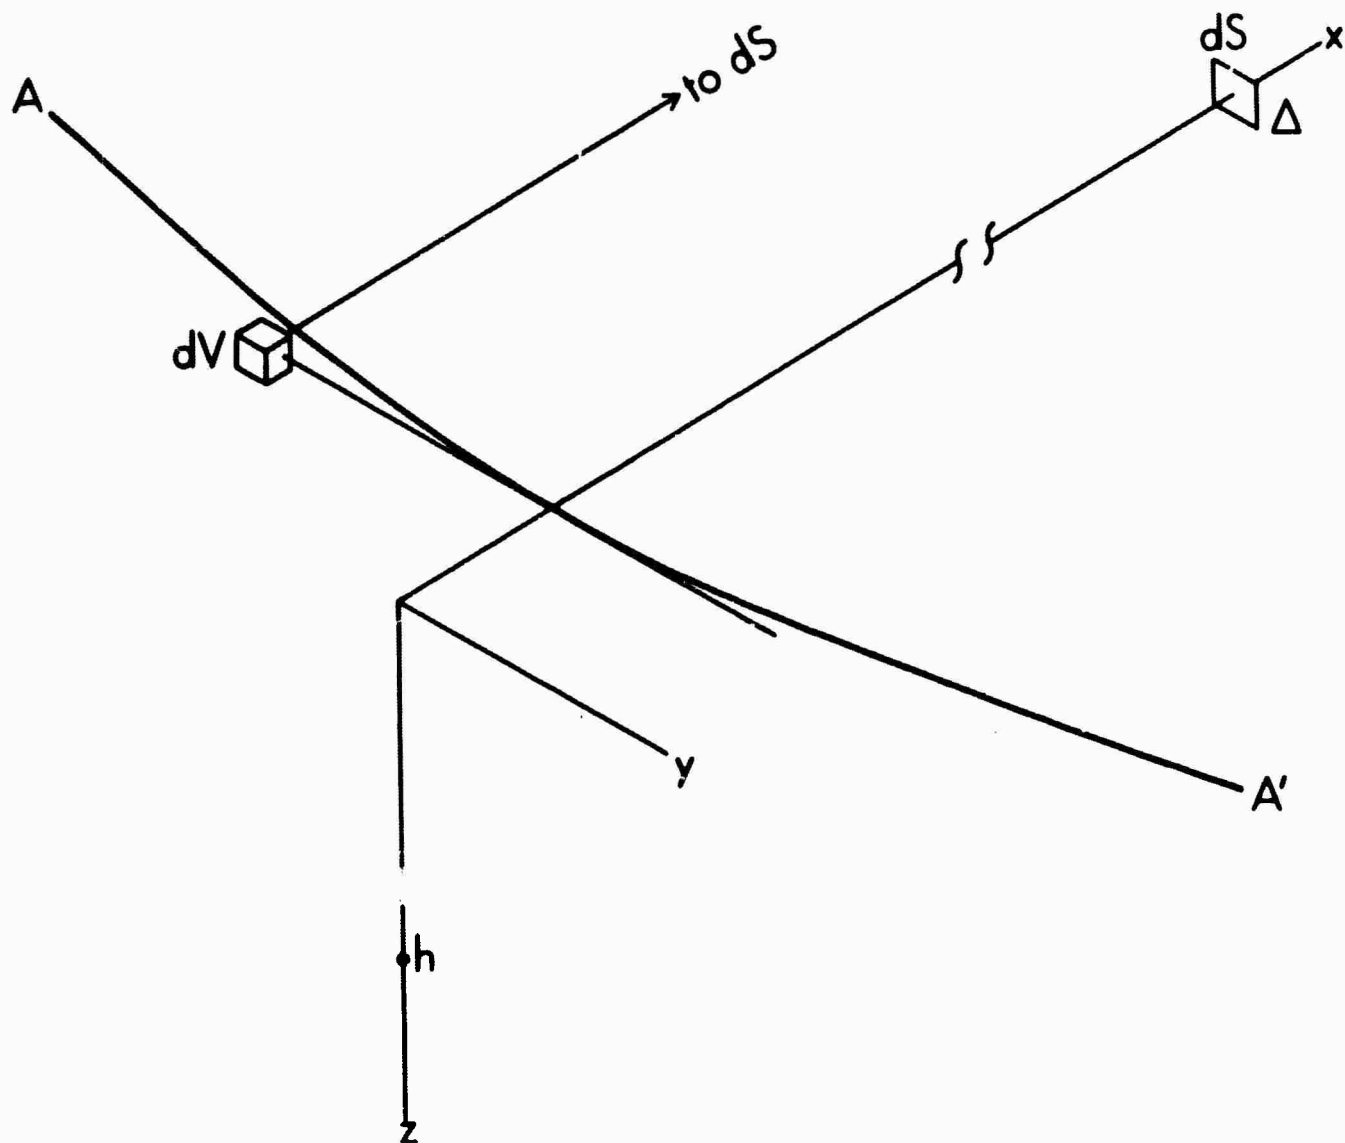
Fig. 8. Geometry for synthesizing abyssal T-phase power level.

From parametric equations (1) and (2) abyssal T-phase records can be synthesized.

Synthetic T phases, where $\alpha = 6$ and $\gamma = 1.3$ km/sec, are shown in Figure 9 for three focal depths. The arbitrary reference level for each synthesized curve has been adjusted so that they have a common asymptote. Two actual T-phase records are also shown for comparison. Despite the extensive simplifications in the foregoing derivation, the characteristic features of the abyssal T phase have been retained, as shown by comparison with the actual recorded events. The degree of sharpness of the abyssal T-phase peak appears to be a valid indicator of focal depth. This indicator appears more sensitive for shallower depth earthquakes.

DIRECTIONS FOR FURTHER STUDY

Abyssal T phases, as here described, have been positively identified only from sources in that sector of the Pacific rim which lies between Japan and Alaska. Throughout this region the sound channel is quite near the surface with the result that refracted surface-reflected (RSR) rays become sofar rays in the lower latitudes of the hydrophones. Is this transformation from RSR to sofar rays a necessary condition for observing abyssal T phases? Other regions where earthquakes occur under a deep ocean floor are off northern California and Oregon and the East Pacific Ridge. However, T phases observed from these regions have the classic low-frequency spectrum. Although the ocean floor in these regions may not be smooth it does not intersect the sound channel axis as is required by the downslope propagation mechanism for producing sofar rays. This anomalous situation must be resolved before our current models of T-phase generation can be completely acceptable.

Further study of the mode of propagation of abyssal T phases may be made by comparing the signal recorded from a sound-channel hydrophone with that from a hydrophone on the deep ocean floor. Such instruments have been installed by the Pacific Missile Range Facility at Wake Island and recording is now in progress.

Under the model proposed there it would be possible to demonstrate a continuously varying superposition of abyssal and slope-generated T phases as the epicenter is moved toward the slope; however, we have not as yet found intervals of less than 65 seconds between high- and low-frequency peaks. Although strong earthquakes with epicenters in non-abyssal regions often generate classic T phases with low-level forerunners, the forerunners appear to be of low frequency. An exception to this is the Kamchatka event shown in Figure 6.

Interest in sound scattering in the ocean has been practically confined to much higher frequencies and to the cases of back-scattering and forward-scattering [Chapman and Scott, 1964]. Some laboratory studies have been conducted with more variable geometry [Moore and Parkins, 1966], but the case of normal incidence was not included and the relation of laboratory

surfaces to the ocean surface is uncertain. More appropriate experimental work is needed to determine the energy reradiated at low grazing angles for normally incident sound at frequencies of less than 100 cps.
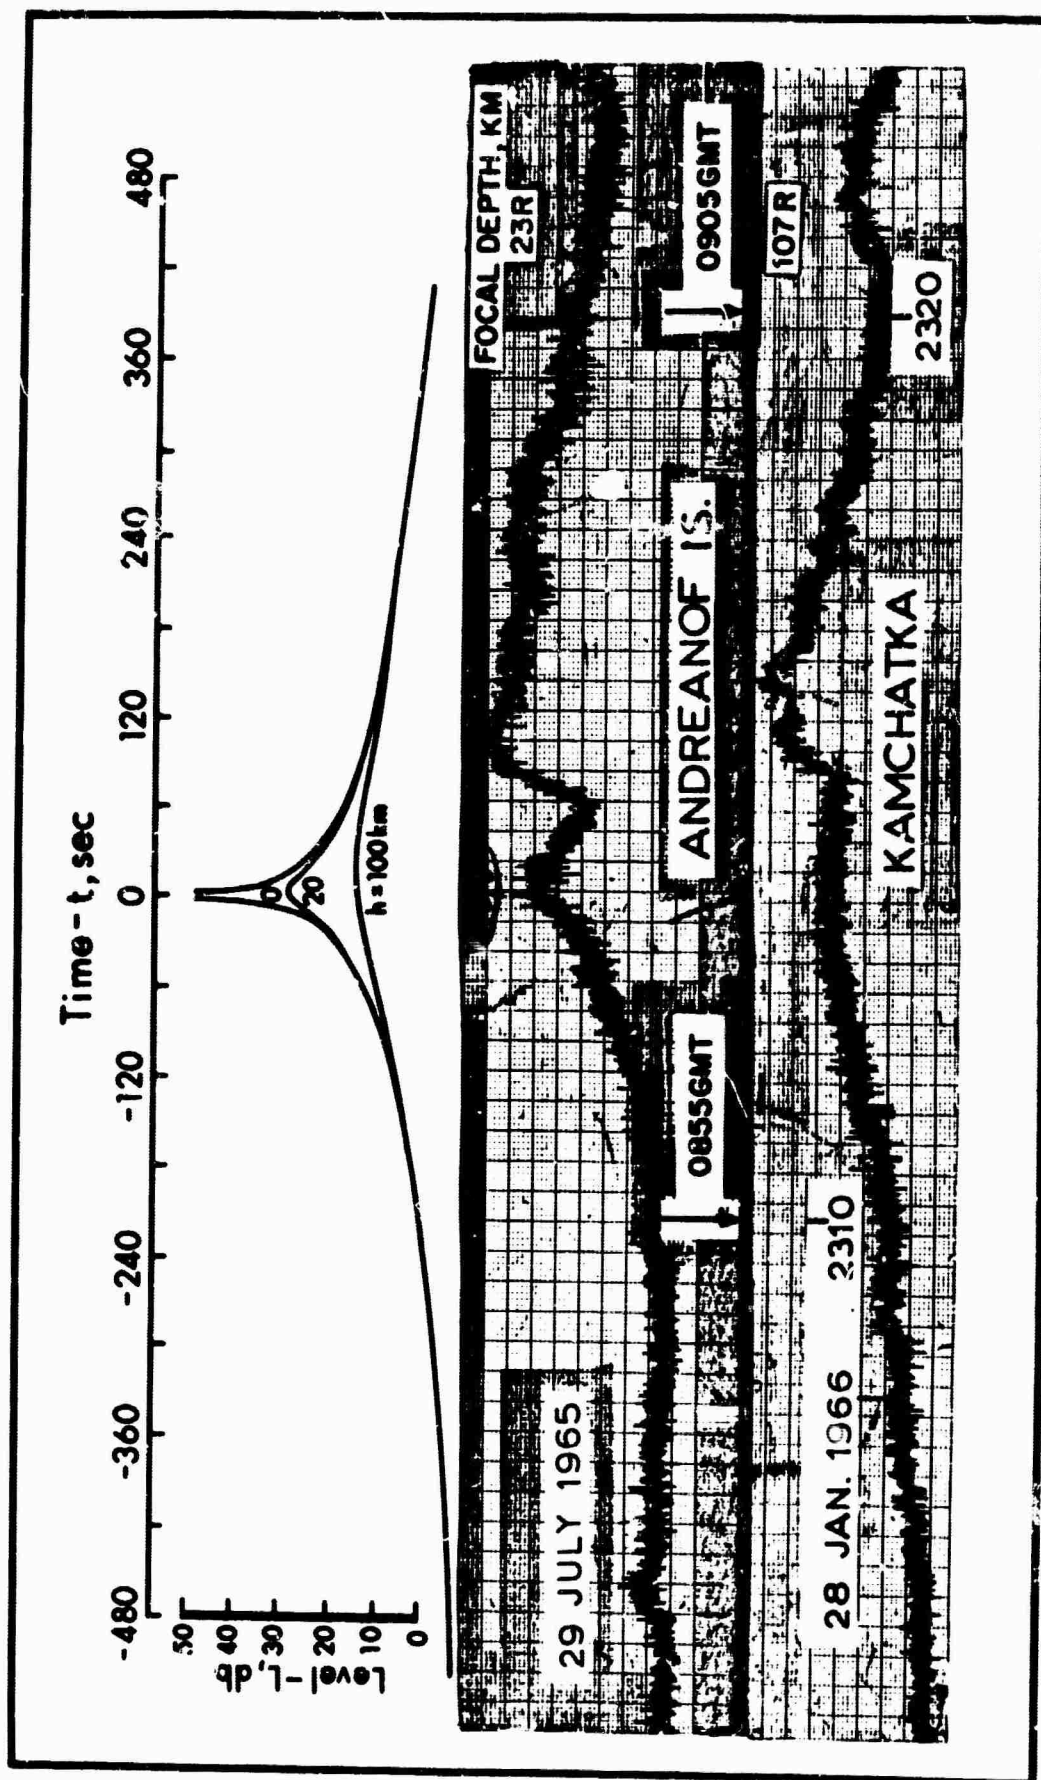
ACKNOWLEDGMENTS

Fig. 9. Synthe... abyssal T phases for two focal depths. Two actual T-phase records are shown for comparison. The level scale is the same for both synthesized and actual records.

REFERENCES

Biot, M. A., 1952: The interaction of Rayleigh and Stoneley waves in
    the ocean bottom, *Bull. Seism. Soc. Am.*, Vol. 42, pp. 81-93.

Chapman, R. P. and H. D. Scott, 1964: Surface backscattering strengths
    measured over an extended range of frequencies and grazing angles,
    J. Acoust. Soc. Am., Vol. 36, pp. 1735-1737.

Ergin, Kazim, 1952: Energy ratio of the seismic waves reflected and
    refracted at a rock-water boundary, *Bull. Seism. Soc. Am.*, Vol. 42,
    pp. 349-372.

Herrin, Eugene and James Taggart, 1966: Epicenter determinations for
    Longshot (Abst.), *Trans. Am. Geophys. Union*, Vol. 47, p. 164.

Johnson, R. H., 1966: Routine location of T-phase sources in the Pacific,
    Bull. Seism. Soc. Am., Vol. 56, pp. 109-118.

Johnson, R. H. and R. A. Norris, 1966: T-phase radiators in the western
    Aleutians, *Hawaii Inst. Geophys. Report 66-4*, 14 pp.

Johnson, R. H., J. Northrop, and R. Eppley, 1963: Sources of Pacific
    T-phases, *J. Geophys. Res.*, Vol. 68. pp. 4251-4260.

Milne, A. R., 1959: Comparison of spectra of an earthquake T-phase with
    similar signals from nuclear explosions, *Bull. Seism. Soc. Am.*,
    Vol. 49, pp. 317-329.

Moore, R. K. and B. E. Parkins, 1966: Omnidirectional scattering of
    acoustic waves from rough surfaces of known statistics, *J. Acoust.
    Soc. Am.*, Vol. 40, pp. 170-175.

Moskowitz, Lionel, 1964: Power spectrums for fully developed wind seas,
    J. Geophys. Res., Vol. 69, pp. 5161-5179.

Piip, Ants T., 1964: Fine structure and stability of the sound channel in
    the ocean, *J. Acoust. Soc. Am.*, Vol. 36, pp. 1948-1953.

Rayleigh, J. W. S., 1945: *The Theory of Sound Vol. II*, First American
    Edition, Dover Publications, Inc., New York, pp. 89-96.

Tolstoy, I. and M. Ewing, 1950: The T phase of shallow-focus earthquakes,
    Bull. Seism. Soc. Am., Vol. 40, pp. 25-51.

UNCLASSIFIED AND CLASSIFIED TECHNICAL REPORTS DISTRIBUTION LIST

(Revised June 1966)

AGENCY

Director
Advanced Research Projects Agency
The Pentagon'
Washington, D. C. 20301
Attn: Nuclear Test Detection Office (10)
      Mr. A. Van Every

Director
Advanced Research Projects Agency'
Research and Development Feild Unit
APO San Francisco 96309
Attn: Mr. Tom Brundage

Director
Advanced Research Projects Agency
Research and Development Field Unit
APO San Francisco 96346

Chief of Naval Research
Department of the Navy
Washington, D. C. 20360
Attn: Code 418
      Code 408G
      Code 402
      Code 427
      Code 468
      Code 466
      Code 416
      Code 463
      code 446

VESIAC
Institute of Science & Technology
The University of Michigan
Box 618
Ann Arbor, Michigan 48107
Attn: Mr. T. W. Caless   (2)

California Institute of Technology
Seismological Laboratory
Pasadena, California 91101
Attn: Dr. F. Press & Dr. H. Benioff

RAND Corporation
1700 Main Street
Santa Monica, California 90401
Attn: Dr. R. Latter
      Dr. E. C. Field, Jr.
      Dr. R. LeLevier
      Dr. C. M. Crain

Lamont Geological Observatory
Columbia a University
Palisades. New York 10964
Attn: Dr. K. L. Hunkins
      Dr. W. M. Ewing
      Dr. Jack Oliver

Bell Telephone Laboratories
Murray Hill, New Jersey 07981
Attn: Dr. John Tukey

Air Force Office of Scientific Research (SRPG)
Architects Building
1400 Wilson Boulevard
Arlington, Verginia 22209

Air Force Cambridge Research Laboratories
L. G. Hanscom Field
Bedford, Massachusetts 01731
Attn: CRJW
      Dr. Philip Newman
      Dr. N. R. Rosenberg

U. S. Coast & Geodetic Survey
Department of Commerce
Rockville, Maryland 20851
Attn: Seismology Branch

U. S. Coast & Geodetic Survey
Sandia Base
Albuquerque, New Mexico 87115

Director
Division of Military
Application
Atomic Energy Commission
Washington, D. C. 20545
Attn: Mr. Donald Gale

Chairman
Atomic Energy Commission
Washington, D. C. 20545
Attn: Dr. A. M. Labowitz, Special
Assict. for Disarmament

National Aeronautics & Space Adminintration
Washington, D. C. 20546
Attn: Dr. Alois W. Schardt,, Chief of
Physics Branch

Director
Institvte of Defense Analyses
400 Army-navy Drive
Arlington, Virginia 22200
Attn: Technical Library

University of Texas
P. O. Box 7789
University Station
Austin, Texas 78712
Attn: Dr. F. X. Bostick

Institute for Telecommunication Sciences
& Aeronomy
Environmental Science SVCS Administration
Boulder, Colorado 80301
Attn: Dr. W. Compbell
Mr. A. G. Jean

Sandia Corporation
Department 5410
Albuquerque, New Mexico 87100
Attn: Dr. B. F. Murphey

Air Force Special Weapons Laboratory
Kirkland Air Force Base, New Mexico 87117
Attn: Technical Library

Los Alamos Scientific Laboratory
Los Alamos, New Mexico 87544
Attn: Dr. C. Longmire
Dr. R. F. Taschek
Dr. D. R. Westervelt

Commanding Officer & Director
U. S. Navy Electronics Laboratory
San Diego, California 92152
Attn: Dr. T. J. Keary
Dr. W. F. Molar
Dr. W. D. Westfall

Advisory Group on Electron Devices
346 Broadway Eight Floor
New York, New York 10013
Attn: Assistant Secretary

Hudson Laboratories
145 Palisade Street
Dobbs Ferry, New York 10522
Attn: Dr. I. Tolstoy & Dr. Clay

Nuclear Research Associates, Incorporated
3501 Queens Boulevard
Long Island City, New York 11101
Attn: Dr. R. Liboff & Dr. M. Bernstein

Rome Air Development Center
(EAMES)
Griffiss Air Force Base, New York 13440
Attn: Mr. S. Digennaro

National Bureau of Standards
U. S. Department of Commerce
Washington, D. C. 20234
Attn: Mr. R. T. Moore
Dr. J. Young

Headquarters
U. S. Air Force (AFRDDD)
Washington, D. C. 20301
Attn: LCOL E. A. Novak,
Director of Development   (2)

Commanding General
U. S. Army Security Agency
Arlington Hall Station
Arlington, Virginia 22212
Attn: Mr. Richard Neill   (2)

Headquarters
U. S. Air Force (AFTAC)
Washington, D. C. 20333
Attn: Mr. D. Northrup
TD-2   (2)
TD-3   (2)

Director
Defense Intelligence Agency
Washington, D. C. 20301
Attn: HQ-TR, Mr. James H. Stewart

GE-TEMPO
816 State Street
Santa Barbara, California 93102
Attn: DASA Information & Analysis Center (2)

Stanford Research Institute
Menlo Park, California 94025
Attn: Dr. R. S. Leonard
      Dr. A. M. Peterson
      Dr. E. T. Pierce

ITT Electro-Physics Laboratories, Inc.
3355 Fifty-second Avenue
Hyattsville, Maryland 20780
Attn: Mr. Harry Busch

Sylvania Electronic Systems
Electronic Defense Laboratories
P. O. Box 205
Mt. View, California 94040
Attn: Dr. John Don Carlos

Lockheed Missiles & Space Company
Research Laboratories
3251 Hanover Street
Palo Alto, California 94300
Attn: Dr. L. Tepley

Stanford Electronics Laboratories
Stanford University
Stanford, California 94305
Attn: Dr. O. G. Villard, Jr.
      Dr. G. H. Berry

Lawrence Radiation Laboratory
University of California
Livermore, California 94550
Attn: Dr. G. C. Werth

Geophysical Institute
University of Alaska
College, Alaska 99735
Attn: Dr. Charles R. Wilson

U. S. Arms Control and Disarmament Agency
Reference Research Service
Department of State Building
Washington, D. C. 20451

Director
U. S. Naval Research Laboratory
Washington, D. C. 20390
Attn: Technical Information Division

Shell Development Company
P. O. Box 481
Houston, Texas 77001
Attn: Exploration Division,
      Dr. Sidney Kaufman

VELA Seismological Center
c/o Headquarters, USAF/AFTAC
Washington, D. C. 20333   (2)

Underwater Systems, Inc.
World Building Room B10
8121 Georgia Avenue
Silver Spring, Maryland 20910
Attn: Mr. M. Weinstein

Commanding Officer
U. S. Navy Electronics Laboratory
San Diego, California 92152
Attn: Mr. Tom McMillian

Commander U. S. Naval Ordnance Laboratory
Silver Spring, Maryland 20910
Attn: Mrs. Ermine A. Christian

Navy SOFAR Station
APO New York 09856
Attn: Mr. Gordon Hamilton

Commander
Headquarters
Naval Ship Systems Command
Washington, D. C. 20360
Attn: Code 03541

Director
Defense Atomic Support Agency
The Pentagon
Washington, D. C. 20301
Attn: Blast and Shock Division
      Radiation Division
      Technical Library

U. S. Geological Survey
7580 West Sixteenth Avenue
Lakewood, Colorado 80215
Attn: Crustal Studies Branch

Scripps Institution of Oceanography
University of California
P. O. Box 109
La Jolla, California 92038
Attn: Mr. J. Northrop

MITRE Corporation
Bedford Massachusetts 01731
Attn: Dr. John Morganstern

IKOR, Incorporated
Northwest Industrial Park
Burlington, Massachusetts 01803
Attn: Dr. A. W. Winston

ARACON Geophysics Company
Virginia Road
Concord, Massachusetts 01742
Attn: Mr. Robert Smiley

Mt. Auburn Research Associates, Inc.
12 Norfolk Street
Cam idge, Massachusetts 02139
Attn: Dr. Sheldon Kahalas

VITRO Corporation
200 Pleasant Valley Way
West Orange, New Jersey 07050
Attn: Dr. David Hill & Mr. L. C. Scholz

U. S. Army Electronics Laboratory
Fort Monmouth, New Jersey 07703
Attn: "r. W. J. Ramm & Dr. H. A. Bomke

Chief of Naval Operations
Department of the Navy
Washington, D. C. 20350
Attn: OP-754

Commander
Antisubmarine Warfare Forces, Pacific
FPO San Francisco 96610
Attn: Vice Admiral John T. Hayward

Commanding Officer
Office of Naval Research Branch Office
Box 39
FPO New York 09510

Cognizant Office of Naval Research Area Branch Office

Lincoln Laboratories
Massachusetts Institute of Technology
Lexing! 1, Massachusetts 02173
Attn: Dr. P. Green

Defense Documentation
  C enter   (20)
Cameron Station
Alexandria, Verginia 22314

Department of Civil Engineering
Stanford University
Stanford, California 94305
Attn: Mr. R. L. Street

Scripps Institution of Oceanography
University of California
La Jolla, California 92038
Attn: Dr. T. R. Folsom

GM Defense Research Laboratories
General Motors Corporation
6767 Hollister Avenue
Golet, California 93107
Attn: Dr. D. S. Potter

Decca Survey Systems, Inc.
3418 Mercer
Houston, Texas 77027
Attn: Mr. P. Goff

DOCUMENT CONTROL DATA - R&D

(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)

1. ORIGINATING ACTIVITY (Corporate author)	2a. REPORT SECURITY CLASSIFICATION
Hawaii Institute of Geophysics University of Hawaii Honolulu, Hawaii 96822	Unclassified
	2b. GROUP

3. REPORT TITLE

Abyssally Generated T Phases

4. DESCRIPTIVE NOTES *(Type of report and inclusive dates)*

Technical Summary Report

5. AUTHOR(S) *(Last name, first name, initial)*

Johnson, Rockne H., Norris, Roger A., and Duennebier, Frederick K.

6. REPORT DATE	7a. TOTAL NO. OF PAGES	7b. NO. OF REFS
January 1967	11 pp., 9 figs.	13

8a. CONTRACT OR GRANT NO.	9a. ORIGINATOR'S REPORT NUMBER(S)
Contract No. Nonr-3748(01) b. PROJECT NO.	HIG-67-1
Project Code 8100	
c.	9b. OTHER REPORT NO(S) *(Any other numbers that may be assigned this report)*
d.	none

10. AVAILABILITY/LIMITATION NOTICES

No limitation

11. SUPPLEMENTARY NOTES	12. SPONSORING MILITARY ACTIVITY
None	Advance Research Projects Agency

13. ABSTRACT

Two distinct types of signals have been identified from studies of T-phase spectra and source locations. One, with its source at a shoaling slope of the ocean bottom and with dominant frequencies near 4 cps, is the previously recognized and described classic T phase. The other, with its source in deep water and with dominant frequencies near 30 cps, is newly identified and is here termed the abyssally generated, or abyssal, T phase. Scattering from the sea surface is proposed as a mechanism for producing rays which propagate through the ocean with an apparent velocity equal to sofar velocity. The sea surface roughness is hypothesized as shaping the spectrum of the abyssal T phase. A synthesis of the power-level record is derived which relates the degree of sharpness of the abyssal T-phase peak with focal depth.

DD FORM 1473
1 JAN 64

14. KEY WORDS	LINK A		LINK B		LINK C	
	ROLE	WT	ROLE	WT	ROLE	WT
T Phase						
Sofar						
Hydrophone						
Epicenter						
Earthquake						

INSTRUCTIONS

1. ORIGINATING ACTIVITY: Enter the name and address of the contractor, subcontractor, grantee, Department of Defense activity or other organization (corporate author) issuing the report.

2a. REPORT SECURITY CLASSIFICATION: Enter the overall security classification of the report. Indicate whether "Restricted Data" is included. Marking is to be in accordance with appropriate security regulations.

2b. GROUP: Automatic downgrading is specified in DoD Directive 5200.10 and Armed Forces Industrial Manual. Enter the group number. Also, when applicable, show that optional markings have been used for Group 3 and Group 4 as authorized.

3. REPORT TITLE: Enter the complete report title in all capital letters. Titles in all cases should be unclassified. If a meaningful title cannot be selected without classification, show title classification in all capitals in parenthesis immediately following the title.

4. DESCRIPTIVE NOTES: If appropriate, enter the type of report, e.g., interim, progress, summary, annual, or final. Give the inclusive dates when a specific reporting period is covered.

5. AUTHOR(S): Enter the name(s) of author(s) as shown on or in the report. Enter last name, first name, middle initial. If military, show rank and branch of service. The name of the principal author is an absolute minimum requirement.

6. REPORT DATE: Enter the date of the report as day, month, year; or month, year. If more than one date appears on the report, use date of publication.

7a. TOTAL NUMBER OF PAGES: The total page count should follow normal pagination procedures, i.e., enter the number of pages containing information.

7b. NUMBER OF REFERENCES: Enter the total number of references cited in the report.

8a. CONTRACT OR GRANT NUMBER: If appropriate, enter the applicable number of the contract or grant under which the report was written.

8b, 8c, & 8d. PROJECT NUMBER: Enter the appropriate military department identification, such as project number, subproject number, system numbers, task number, etc.

9a. ORIGINATOR'S REPORT NUMBER(S): Enter the official report number by which the document will be identified and controlled by the originating activity. This number must be unique to this report.

9b. OTHER REPORT NUMBER(S): If the report has been assigned any other report numbers (either by the originator or by the sponsor), also enter this number(s).

10. AVAILABILITY/LIMITATION NOTICES: Enter any limitations on further dissemination of the report, other than those imposed by security classification, using standard statements such as:

(1) "Qualified requesters may obtain copies of this report from DDC."

(2) "Foreign announcement and dissemination of this report by DDC is not authorized."

(3) "U. S. Government agencies may obtain copies of this report directly from DDC. Other qualified DDC users shall request through

_____."

(4) "U. S. military agencies may obtain copies of this report directly from DDC. Other qualified users shall request through

_____."

(5) "All distribution of this report is controlled. Qualified DDC users shall request through

_____."

If the report has been furnished to the Office of Technical Services, Department of Commerce, for sale to the public, indicate this fact and enter the price, if known.

11. SUPPLEMENTARY NOTES: Use for additional explanatory notes.

12. SPONSORING MILITARY ACTIVITY: Enter the name of the departmental project office or laboratory sponsoring (paying for) the research and development. Include address.

13. ABSTRACT: Enter an abstract giving a brief and factual summary of the document indicative of the report, even though it may also appear elsewhere in the body of the technical report. If additional space is required, a continuation sheet shall be attached.

It is highly desirable that the abstract of classified reports be unclassified. Each paragraph of the abstract shall end with an indication of the military security classification of the information in the paragraph, represented as (TS), (S), (C), or (U).

There is no limitation on the length of the abstract. However, the suggested length is from 150 to 225 words.

14. KEY WORDS: Key words are technically meaningful terms or short phrases that characterize a report and may be used as index entries for cataloging the report. Key words must be selected so that no security classification is required. Identifiers, such as equipment model designation, trade name, military project code name, geographic location, may be used as key words but will be followed by an indication of technical context. The assignment of links, roles, and weights is optional.